

TM-081

Size: W-14.85 x H-21cm

OUTDOOR DIGITAL TIMER

With the Outdoor Light Timer, you decide when you want the lights to turn on and off. Ideal for security lighting (while you're away from home), holiday lighting, landscaping and recreational areas.

To Operate:

Plug the timer into a 3-conductor outlet.

Use the selector switch to choose your timing:

<u>SELECT</u>	<u>DESCRIPTION</u>
F	OFF - no power
O	ON - constant power
D	On at dusk, Off at dawn
1 - 9	On at dusk, set time Off for 1-9 hours*
1 - 9.	On immediately, set time Off for 1-9 hours*

* Cycle repeats every 24 hours

CAUTION:

Total cumulative wattage of all lights must not exceed 1,000 watts. Use three conductor outlet only. Do not immerse in water.

SUITABLE FOR USE WITH OUTDOOR APPLIANCES – RAIN-TIGHT WHEN MOUNTED VERTICALLY WITH THE RECEPTACLE FACING DOWNWARD. NOT FOR WATER IMMERSION. STORE INDOOR WHEN NOT IN USE.

INSTALL THE CORD AND UNIT ABOVE GROUND LEVEL AT LEAST 1.4 M WITH THE RECEPTACLE FACING DOWNWARD.

Rating:


125Vac 60Hz 13 A Resistive.

13 A General Use.

1000 W Tungsten.

500 VA Electronic Ballast. 1/2 hp.

120Vac 60Hz 8.3A Ballast.

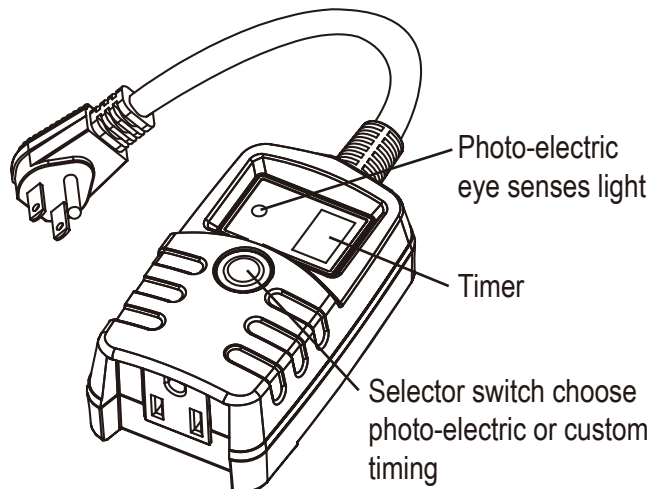

Made in China